WATERGATE ADAPTA+


Floor-standing model (WG-AF200)



Product photo



Remote control

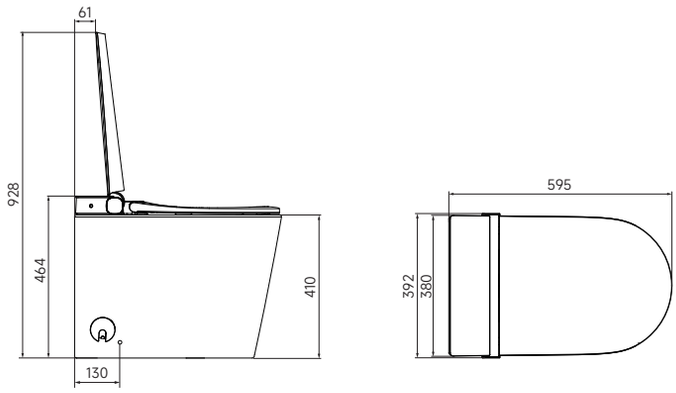

Technical drawings (unit: mm)

Short description

Floor-standing one-piece electronic shower toilet with washing and drying. Rimless ceramic bowl with integrated wash-down flush (4.5 l / 3.0 l), so no concealed cistern or WC module is needed. Automatic opening and closing of the lid, with a soft-close seat and lid. **Compared with wall-hung ADAPTA models, this version adds a foot sensor, plasma sterilisation and automatic pre-wetting of the bowl.**

Compatibility

Floor-standing installation with floor fixing bolts. Three drainage options: P-trap (horizontal outlet 180 mm above floor), S-trap (156 mm from wall) and T-shaped outlet (64.5 mm from wall). The S/T discharge pipe set is cut to size on site. Requires a new water supply hose to the angle valve and a dedicated grounded 220-240 V circuit (min. 10 A) protected by a 10 mA RCD.

Purpose of use

- For comfortable use of a toilet with an integrated bidet.
- For cleansing the anal and female intimate area with water.

Package contents

- Shower toilet with integrated bidet
- Remote control with wall holder
- Angle valve
- Discharge pipe set (S-trap / T-shaped)
- Decorative covers and caps, fixing accessories
- Installation manual and remote control instructions


See the installation manual for detailed part descriptions. Descaling agent is not included.

Funkce

- Rear wash
- Women’s wash
- Oscillation (moving nozzle)
- Antibacterial nozzle, removable
- Water temperature setting (6 levels)
- Water flow adjustment (5 levels)
- Adjustable nozzle position (5 levels)
- Nozzle self-cleaning
- Manual nozzle cleaning
- Descaling system with descaling reminder
- Plasma sterilisation
- Air drying (6 temperature levels)
- Night light (manual / intelligent mode)
- Soft-close seat and lid
- Opening and closing the seat and lid by remote
- Proximity sensor (automatic opening and closing)
- Automatic flushing when user leaves (intelligent / always on / off)
- Full flush 4.5 l / half flush 3.0 l; adjustable flush volume
- Quiet mode, energy saving mode
- AUTO/STOP buttons on the main unit
- Remote control, information display, up to 9 user codes
- **Heated seat (6 temperature levels)**
- **Foot sensor (opening lid/seat, closing and half flush)**
- **Automatic pre-wetting of the bowl**

Latest manual online

Drainage options

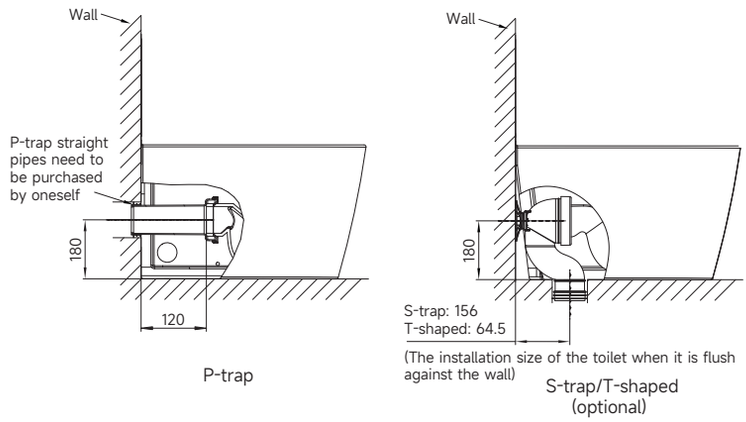

P-trap / S-trap / T-shaped (unit: mm)

Technical data

Toilet installation (type)	Floor-standing, one-piece
Drainage	P-trap (180 mm above floor) / S-trap (156 mm from wall) / T-shaped (64.5 mm from wall), outlet Ø 102 mm
Flush volume	4.5 l (full) / 3.0 l (half), adjustable
Connector for water connection	G 3/8" (angle valve supplied)
Rated voltage	AC 220-240 V, 50/60 Hz
Rated power (main unit)	1055 W
Heating power	Water heater 1500 W, dryer 200 W, seat 50 W
Required circuit	Dedicated, grounded, min. 10 A, RCD ≤ 10 mA
Inlet water pressure	0.08-0.8 MPa static (min. 8.5 l/min)
Inlet water temperature	3-35 °C
Ambient temperature	4-40 °C
Waterproof rating	IPX4
Water heating mode	Instantaneous heater
Water temperature	Off / 30 / 32 / 34 / 36 / 38 °C (6 levels)
Water flow	450-600 mL/min (5 levels)
Wash cycle length	80 seconds
Dryer	0.2 m³/min, 6 temperature levels
Seat temperature	6 levels, automatic reduction after 10 minutes of use
Safety equipment	Seat sensor, temperature sensors, thermal fuses, thermostats, over-temperature protection, ground protection, leak protection device
Backflow prevention	Anti-syphon and anti-backflow device, inlet filter, EN 13077 certified
Antibacterial parts	Seat, nozzle
Remote control	Radio frequency (RF)
Frequency range	2465 MHz, 2470 MHz, 2475 MHz, 2480 MHz
Maximum output power (RF)	10 mW
Battery type	2 x AAA
Gross weight	45 kg
Dimensions (D x W x H)	595 x 380 x 435 mm (width incl. side control 392 mm)
Load capacity of the toilet	400 kg
Warranty	2 years
Certifications	CE, EN 997, EN 13077